

ozonia[®] lab2b

laboratory ozone generators



The **ozonia[®] LAB2B** is a corona discharge type ozone generator with variable ozone output. Producing up to 4g O₃/h using air and 10g O₃/h using oxygen. It is designed specifically for laboratory research.

applications

- research and development
- education

ozone technology: ozonia® lab2b



product highlights

- ▶ variable ozone output up to 10g O₃/h
- ▶ operate under vacuum or at maximum pressure of 10psig
- ▶ illuminating switches indicating ozone production and faults
- ▶ air cooled
- ▶ O&M manual included performance graphs
- ▶ full twelve months warranty
- ▶ technical backup facilities
- ▶ feed gas: air or oxygen
- ▶ compact dimensions

The **ozonia® LAB2B** ozone generator is a small air-cooled unit specifically designed for bench use incorporating function indicators, feed gas flowmeter and variable output control.

Output variation is manually adjustable using a control knob mounted on the front panel.

Operating on various feed gases such as dried air or oxygen the **ozonia® LAB2B** is capable of producing concentrations up to 10% volume.

how it works

Ozone is produced when dry air or oxygen gas is passed over the ceramic dielectric of an ozone generating module. The module is powered by a high voltage/high frequency power board.

The electronic power board is designed for either intermittent or continuous operation. The ceramic dielectric is housed within a finned heat sink block which is air cooled by fan assisted atmospheric air.


technical data	ozone output ⁽¹⁾		ozone output ⁽²⁾		feed gas flow rate		variable output control	power supply	power consumption
	g/h	lb/h	g/h	lb/h	l/min air	l/min oxygen	%	V/ph/Hz	W
ozonia® LAB2B	4.0	0.14	10.0	0.35	4-10	2-5	15-100	230/1/50 or 115/1/60	105

(1) feed gas: dry air -60°C dewpoint


(2) feed gas: 100% oxygen

ozonia® LAB2B


front view

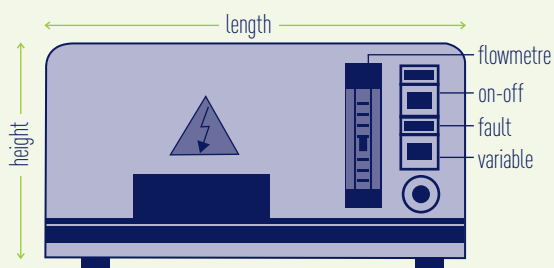

side view

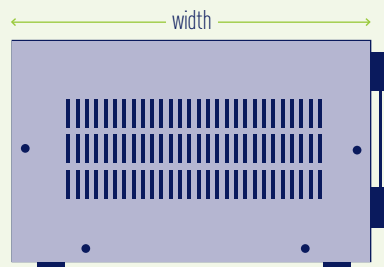

rear view

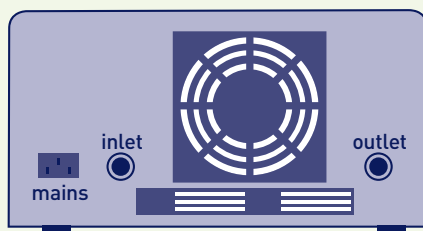

technical features

- ▶ **operating method:** vacuum or pressure (10psi max.)
- ▶ **module cooling medium:** ambient air (fan assisted)
- ▶ **connections:** PVDF compression fitting to suit 8 mm (0.31 inch) OD PIPE

materials

- ▶ **enclosure:** mild steel, epoxy coated
- ▶ **module:** 316 stainless steel electrode assembly inside a ceramic dielectric tube supported by P.T.F.E end caps

options

- ▶ additional LAB2B units for larger ozone output

remote control and alarms

- ▶ **ozone on-off:** green illuminator switch
- ▶ **fault red:** illuminator switch
- ▶ **flowmetre:** 2-10 l/min

model	L x H x W		weight	
	inch	mm	lb	kg
ozonia® LAB2B	5.43 x 2.48 x 4.64	138 x 63 x 118	24.3	11

Veolia's **ozonia**® ozone technology portfolio includes products from the laboratory scale to the largest ozone systems ever built. Veolia uses our extensive ozone technology experience to provide the industry's most reliable and robust products.

Our unique ability to deliver the most reliable and robust systems is why thousands of customers around the world have chosen **ozonia**® ozone systems.

We have been the ozone industry pioneer for over 25 years. Trust Veolia to deliver the highest quality ozone solutions to meet your treatment challenges.

7
product ranges
certified to
international
standards

over
10,000
installations

over
25
years of
experience



europe

france

tel: +33 5 61 36 30 36

switzerland

tel: +41 44 801 8511

russia

tel: +7 831 434 1628

united kingdom

tel: +44 1355 220 598

info@curio.group

www.curiowater.com

curio water

Pioneer House, 30 Celtic Court, Ballmoor, Buckingham, MK18 1RQ
Email: info@curio.group | Tel: +44 (0) 1442 843640



Water Technologies & Solutions
Channel Partner